

The background of the entire page is a photograph of a modern, multi-story commercial building at dusk. The building features a large glass facade that reflects the twilight sky. The lower portion of the building has a brick or stone base. Several trees and shrubs are planted in front of the building, and some outdoor lighting fixtures are visible. The sky is a deep blue with some light clouds.

PHILIPS

Professional lighting

Professional Distribution Catalogue

2024 - 25

Philips LED lighting

Leading the market today,
transforming the future.

We are at the forefront of today's market, paving the way for a transformative future. Our expertise lies in designing, developing, and manufacturing LED lighting products, leading to an extensive intellectual property portfolio and over 20,000 number of patents. Strengthening our leadership position and driving revenue in the LED lighting market, our solutions cater to various segments such as offices, retail, industries, and public spaces. With cutting-edge technology and top-notch product performance, we proudly earn the trust of lighting specifiers worldwide, shining a confident light on the path ahead.



Content

05-73	Indoor professional trade luminaires
72-89	Outdoor professional trade luminaires
90-97	City beautification range
98-113	Professional lamps
114-133	Solar range
136-137	Driver

Indoor Professional Trade Luminaires

Discover Philips range of energy-efficient indoor professional lighting solutions. Experience the innovative, stylish, and easy to install indoor professional luminaires are suitable for use across a wide range of industrial lighting applications, whether you're looking for warehouse lighting, shop lighting, or office lighting.

Troffer




IP20 rated
product



2.5kV surge
protection



Efficacy:
100 lumens/watt

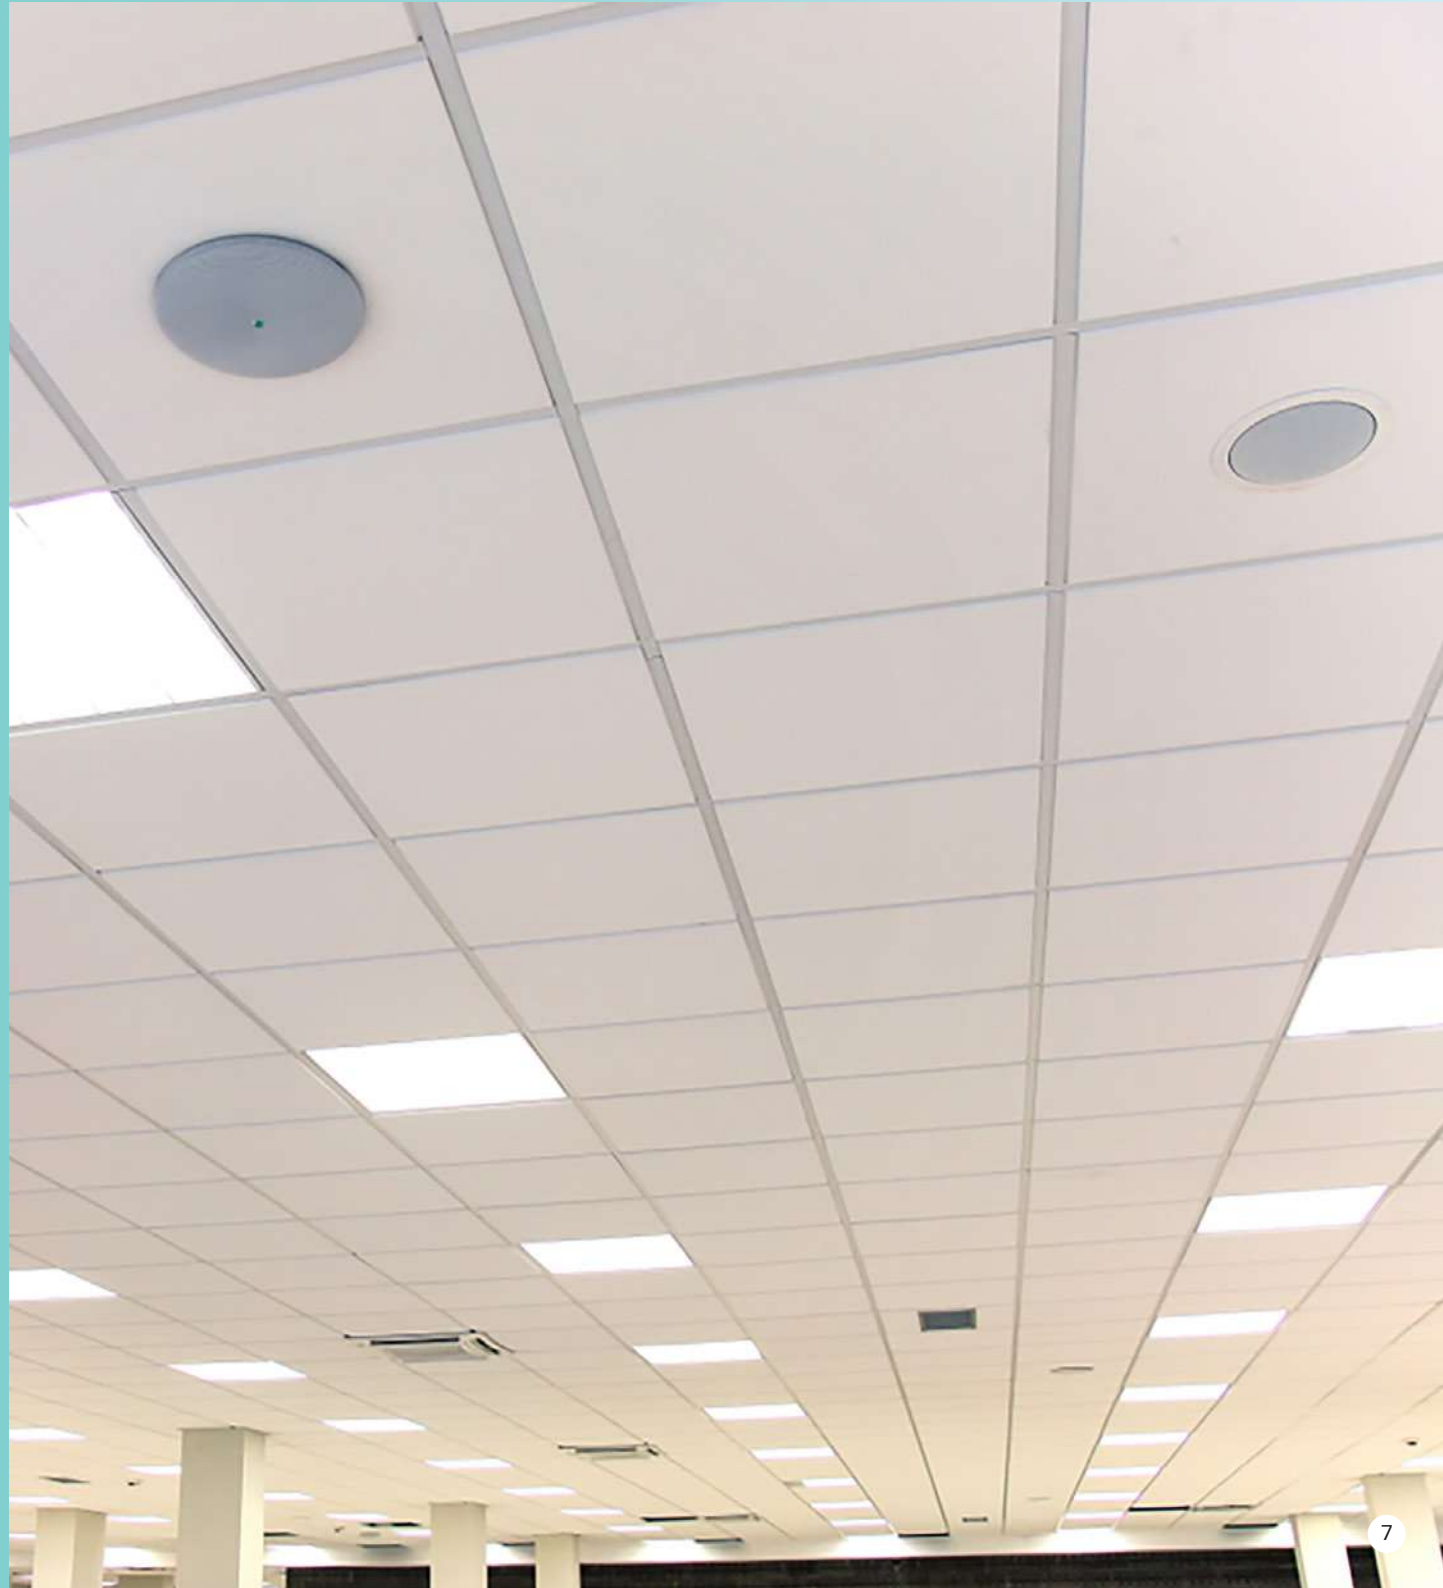



FullGlow Essential 2X2

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED30S-4000/6500 V2 L60W60 PSU OD	30W	3000	3200/-
RC360B LED36S-4000/6500 V2 L60W60 PSU OD	36W	3600	3500/-

HSN Code: 94051090



Long life:
25,000 burning
hrs



Housing:
CRCA



Energy efficient:
>100 lumens/watt



Unique slim design:
Super slim with just
35mm depth inside ceiling



Mounting:
Provision for clip mounting slot

Color available:

NW


CW



FullGlow Essential 1x1

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED20S-4000/6500 L30W30 PSU OD	20W	2000	2500
RC360B LED25S-4000/6500 L30W30 PSU OD	25W	2500	2700

HSN Code: 94051090

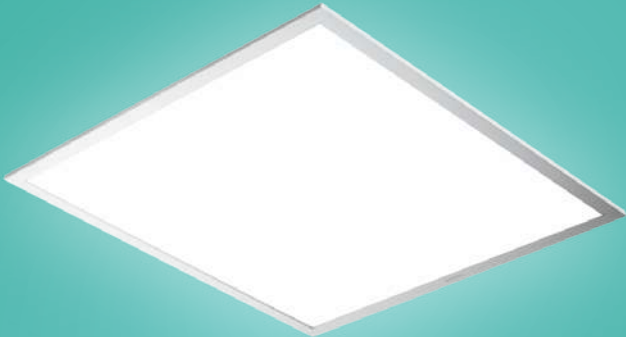

IP20 rated product



2.5kV surge protection



CRI>80 & Powerfactor >0.9



Efficacy: 100 lumens/watt



Versatile use for industry, offices & public applications



Prefix clamps for false ceiling

Color available:

NW


CW



SmartBright Surface 300-1x1

Model Number	Wattage	Lumen	MRP (₹)
SM360B LED20S-4000/6500 L30W30 PSU OD	20W	2000	2700
SM360B LED25S-4000/6500 L30W30 PSU OD	25W	2500	2800

HSN Code: 94051090

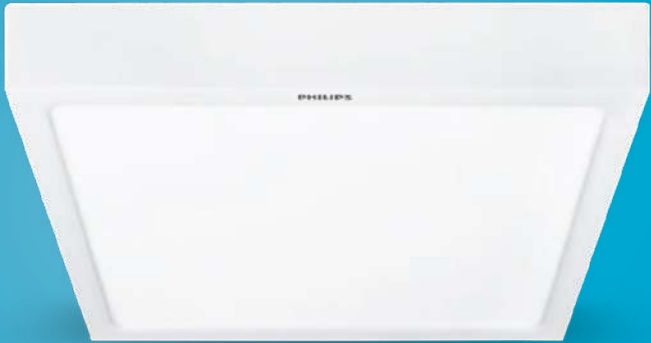

Surge 2.5kV



IP20 rating product



Efficacy: 100 lumens/watt



High CRI>80 and SDCM<5



Easy to install and maintain



Operating temperature: 0 to 45 degree Celsius

Color available:





SmartBright Essential 1x4

Model Number	Wattage	Lumen	MRP (₹)
RC360B LED30S-6500 L120W30 PSU OD	30W	3000	3500
RC360B LED36S-6500 L120W30 PSU OD	36W	3600	3700

HSN Code: 94054010



Fully diffused luminaire



Up to 30,000 working hrs



Efficacy: 100 lumens/watt



High uniformity & CRI>80



Surge: 4kV

Colors available:





SmartBright Linear Gen 2

Model Number	Wattage	Lumen	MRP (₹)
SP170P LED25S-6500 PSU W5L113 OD BK/WD	25W	2500	8000/-
SP170P LED50S-4000/6500 PSU W5L226 OD BK/WD	50W	5000	14000/-
SP170 W50 AC JB (Joining Accessories)			550/-

HSN Code: 85395000



Extruded aluminum housing



Available in both stand alone and continuous version



Available in 4 feet and 8 feet



Available in black & white body



Suspension Included

Color available:



Spotlight



Housing:
Metal housing for
better heat dissipation



**4kV surge
protection**



Long life:
25,000 burning
hrs





Sky COB Tilttable

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
7W Sky COB Tilt LED Spotlight CW / NW / WW	7W	80mm	560	1500/-
12W Sky COB Tilt LED Spotlight CW / NW / WW	12W	88mm	960	2000/-
18W Sky COB Tilt LED Spotlight CW / NW / WW	18W	120mm	1440	3000/-
22W Sky COB Tilt LED Spotlight CW / NW / WW	22W	137mm	1760	4000/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Housing:
Metal housing for better heat dissipation



Voltage protection:
160V-360V with surge protection of 2.5kV



Smart engineering:
Tilttable spotlight with decorative finish

Color available:





SmartBright Accent Adjustable

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
RS262B LED6S PSU (CW/NW/WW)	6W	75mm	600	1650/-
RS262B LED10S PSU (CW/NW/WW)	10W	75mm	1000	2020/-
RS262B LED15S PSU (CW/NW/WW)	15W	90mm	1500	3540/-
RS262B LED20S PSU (CW/NW/WW)	20W	120mm	2000	4100/-
RS262B LED30S PSU (CW/NW/WW)	30W	140mm	3000	4630/-

HSN Code: 94051090



4kV surge protection



CRI>80



Wide operating temp: -10 degree to 45 degree Celsius



Available in 6W to 30W



36° beam angle ideal for accent lighting

Color available:





SmartBright Accent Wall Washer

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
RS263B LED8S PSU (CW/NW/WW)	8W	80mm	800	2020/-
RS263B LED15S PSU (CW/NW/WW)	15W	95mm	1500	3030/-
RS263B LED20S PSU (CW/NW/WW)	20W	117mm	2000	3920/-
RS263B LED36S PSU (CW/NW/WW)	36W	151mm	3600	4900/-

HSN Code: 94051090



4kV surge protection



CRI>80



Wide operating temp: -10 degree to 45 degree Celsius



Available in 8W to 36W



36° beam angle ideal for accent lighting

Color available:





AccentSpot

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
30W Accent Spot CW/NW/WW	30W	120mm	2250	3995/-

HSN Code: 94051090



Long life:
30,000 burning
hrs



Housing:
Aluminum diecast
housing



Luminosity:
Strong focused
beam with 36
degree angle



Mounting:
Tilttable spot base

Color available:





Essential SmartBright Cylinder Spot

Model Number	Wattage	Lumen	MRP (₹)
SP320P LED6S-6500 PSU DIA80 WH	6W	600	3,800/-
SP320P LED10S-6500 PSU DIA80 WH	10W	1000	4,100/-
SP320P LED15S-6500 PSU DIA80 WH	15W	1500	4,300/-
SP320P LED20S-6500 PSU DIA80 WH	20W	2000	4,600/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Housing:
Metal housing for better heat dissipation



Voltage protection:
160V-360V with surge protection of 2.5kV



Mounting:
Suitable for both suspended and surface options

Color available:





Essential SmartBright Projector

Model Number	Wattage	Lumen	MRP (₹)
ST033T LED5S WW/NW/CW	7W	595	3000/-
ST033T LED8S WW/NW/CW	10W	850	3500/-
ST033T LED17S WW/NW/CW	20W	1700	4000/-
ST033T LED25S WW/NW/CW	30W	2500	5000/-
(Accessories) RCS033 1C L 1000 BK/WH (Track)	-----	-----	3000/-
(Accessories) RCS033 1C L 2000 BK/WH (Track)	-----	-----	5000/-

HSN Code: 94051090



Long life:
30,000 burning hrs



Housing:
Metal heat sink for durable performance



Luminosity:
Strong focused beam with 36 degree angle



Impact resistance:
IK03

Color available:



Strip Light



Long life:
20,000 burning
hrs



Housing:
Superior adhesive
for easy and worry-free
installation





SkyCove LED Strip 28W

Model Number:	Wattage	Lumen	MRP (₹)
LED Strip SKYCove 5M WW / NW / CW with driver	28W	2150	1540/-
HSN Code: 94051090			



Long life:
20,000 burning hrs



Other features:
48 LEDs per meter & comes with a driver

Color available:





SkyPro LED Strip Light 45W

Model Number:	Wattage	Lumen	MRP (₹)
Sky Pro 168 LED /Mtr NW/ WW/ CW	45W	700/M	2150/-

HSN Code: 94054010



Long life:
20,000 burning
hrs



Housing:
Superior adhesive
for easy and worry-free
installation



**Shadow free
lighting:** 5 meter
LED strip especially
designed for profile use



Uniform brightness:
Intense lighting with
700 lumens/meter

Color available:





SkyPro LED Strip Light 24V & 60W

Model Number:	Wattage	Lumen	MRP (₹)
LED Strip 24V 238LED 5m Strip	60W	1100/M	2250/-
CV LED Driver 60W 24V 2.5A (Accessories)	60W		999/-

HSN Code: 94051100



No over heating



Uniform light output due to Less voltage drop



CRI>80



Higher efficiency

Color available:





28 SkyCove LED Strip

Model Number:	Wattage	Lumen	MRP (₹)
LED Sky Cove Strip 5M WW/NW/CW with driver	28W	2150	1660/-
HSN Code: 94054010			



Long life:
20,000 burning hrs



Other features:
60 LEDs per meter & comes with a driver

Color available:



Downlights



Long life:
30,000 burning
hrs



Mounting:
Surface/wall mounted
LED downlight for
multipurpose utility



Wide voltage protection:
140V-270V with surge
protection of 2.5kV






Sleek Surface

Model Number	Wattage	Lumen	MRP (₹)
SM260C LED7S-3000/4000/ 6500 PSU WH (Square)	6W	750	1100/-
SM260C LED12S-3000/4000/6500 PSU WH (Square)	12W	1200	1200/-
SM261C LED16S-3000/4000/6500 PSU WH (Square)	15W	1600	1750/-
SM261C LED20S-3000/4000/6500 PSU WH (Square)	18W	2000	1950/-
SM250C LED7S-3000/4000/ 6500 PSU WH(Circular)	6W	750	1100/-
SM250C LED12S-3000/4000/6500 PSU WH(Circular)	12W	1200	1200/-
SM251C LED16S-3000/4000/6500 PSU WH(Circular)	15W	1600	1750/-
SM251C LED20S-3000/4000/6500 PSU WH (Circular)	18W	2000	1950/-

HSN Code: 94054010

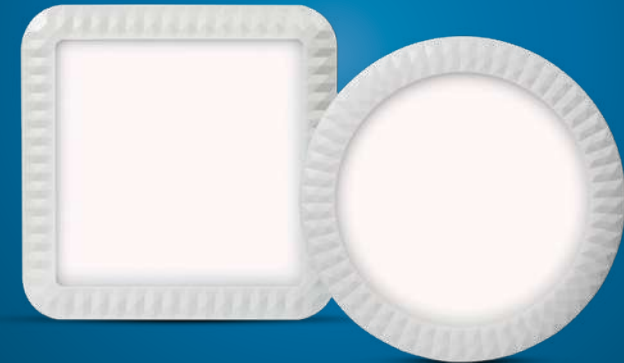

Long life:
30,000 burning
hrs



Mounting:
Surface/wall mounted LED
downlight for multipurpose utility



Wide voltage protection:
140V-270V with surge
protection of 2.5kV

Color available:





Sleek Surface

Model Number	Wattage	Lumen	MRP (₹)
SM295C LED6S (CW/NW/WW)	6W	700	1700
SM295C LED10S (CW/NW/WW)	9W	1000	1800
SM296C LED12S (CW/NW/WW)	11W	1200	2200
SM296C LED15S (CW/NW/WW)	13.5W	1500	2300
SM296C LED20S (CW/NW/WW)	18W	2000	2400

HSN Code: 94054010



Long life:
30,000 burning
hrs



Mounting:
Surface/wall mounted LED
downlight for multipurpose utility



Wide voltage protection:
140V-270V with surge
protection of 2.5kV

Color available:





Surface Glow

Model Number	Diameter	Height	Wattage	Lumen	MRP (₹)
SM240C-LED-12S-PSU-WH	121mm	36mm	12W	1200	1400/-
SM240C-LED-15S-PSU-WH	177mm	36mm	15W	1500	1900/-
SM240C-LED-20S-PSU-WH	177mm	36mm	20W	2000	2100/-
SM240C-LED-24S-PSU-WH	223mm	36mm	24W	2400	2600/-

HSN Code: 94054010



Upto 25,000 working hrs



Energy efficient: >100lm/w



High uniformity & CRI>80



Surge: 4kV



Look and feel: Fully diffused luminaire



Sturdy metal body, trim less for superior look

Color available:





SkyGlow Next-Gen Downlight

Model Number	Cutout	Dimension	Wattage	Lumen	MRP (₹)
6W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 75 mm	108 x 108 x 21mm	6W	600	600/-
12W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 110 mm	130 x 130 x 21mm	12W	1200	845/-
15W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 140 mm	160 x 160 x 21mm	15W	1500	TBD
18W SkyGlow Next Gen LED DL CW/ NW/ WW	R & SQ 140 mm	160 x 160 x 21mm	18W	1800	1070/-

HSN Code: 94054010



Long life:
30,000 burning hrs



Wide voltage protection:
160V-360V with surge protection of 2kV



Safety:
BIS safety standards registered



Shapes available:
Round and square

Color available:





GreenPerform Sleek G2

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
DN295B LED6S-6500 PSU WH	5.5W	125mm	600	1400/-
DN295B LED8S-6500 PSU WH	7W	125mm	800	1550/-
DN295B LED10S-6500 PSU WH	9W	125mm	1000	1700/-
DN296B LED12S-6500 PSU WH	11W	150mm	1200	2100/-
DN296B LED15S-6500 PSU WH	13.5W	150mm	1500	2500/-
DN296B LED20S-6500 PSU WH	18W	150mm	2000	3000/-

HSN Code: 94054010



Sleek design



Robust PDC housing



Narrow rim renders:
A pleasing aesthetic look

Color available:





GreenLED Plus

Model Number	Wattage	Cutout size	Lumen	MRP (₹)
DN171 7.5 S LED DL G2 WW/ NW/ CW	7.5W	115/165mm	750	760/-
DN172 12.5 S LED DL G2 WW/ NW/ CW	12.5 W	115/165mm	1250	960/-
DN172 15 S LED DL G2 WW/ NW/ CW	15W	115/165mm	1500	1060/-
DN172 18S LED DL G2 WW/ NW/ CW	18W	115/165mm	1800	1160/-
DN176 7.5 S LED DL G2 WW/ NW/ CW	7.5W	103/148mm	750	760/-
DN177 12.5 S LED DL G2 WW/ NW/ CW	12W	103/148mm	1250	960/-
DN177 15 S LED DL G2 WW/ NW/ CW	15W	103/148mm	1500	1060/-
DN177 18S LED DL G2 WW/ NW/ CW	18W	103/148mm	1800	1160/-

HSN Code: 94054010



Long life:
25,000 burning
hrs



Housing:
Pressure diecast



Surge protection:
2.5kV



Shapes available:
Round and square

Color available:



Bulkhead



Long life:
25,000 burning
hrs



Housing:
Pressure diecast
housing



IP rating:
Dust and waterproof





VistaGlow

Model Number	Wattage	Lumen	MRP (₹)
WT140W LED7S CW/NW PSU S1 PC	6.5W	700	1600/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Housing:
Pressure diecast housing



IP rating:
Dust and waterproof



IK08 Impact resistance:
IK08 (Vandal Proof)

Color available:

NW

CW



VistaGlow Essential Bulkhead

Model Number	Wattage	Lumen	MRP (₹)
WT 110	10W	1000	1100

HSN Code: 94051090



Long life:
20,000 burning hrs



Housing:
PVC housing with unbreakable polycarbonate diffuser



IP65 rated product



Efficacy:
100 lumens/watt



IK08 rated product

Color available:

NW

CW

Batten



Long life:
25,000 burning
hrs



Wide voltage protection:
140V-270V



Housing:
Extruded aluminum housing
(enhances safety) with high
quality polycarbonate diffuser





SmartBright Extra Batten

Model Number	Wattage	Lumen	MRP (₹)
BN021 LED40S 6500/ 4000 PSU GR	36W	4000	1499/-
BN 021 LED40S 6500 PSU GR-V2	40W	4000	800/-
BN 021 LED50S 6500 PSU GR-V2	50W	5000	870/-

HSN Code: 94051090

110 Lm/w with 20000 burning hours

SmartBright Batten

Model Number	Wattage	Lumen	MRP (₹)
BN021 LED12S 6500K/4000K PSU GR	12W	1200	570/-
BN021 LED22S 6500K/4000K PSU GR	22W	2200	850/-

HSN Code: 94051090



Long life:
25,000 burning hrs



Wide voltage protection:
140V-270V



Aluminum extrusion



Housing:
Extruded aluminum housing (enhances safety) with high quality polycarbonate diffuser



Efficacy:
110 lumens/watt



CRI>80

Color available:

NW

CW



StarLine Pro

Model Number	Wattage	Lumen	MRP (₹)
StarLine Pro 22 W	22W	2200	649/-

HSN Code: 94051090



Long life:
15,000 burning
hrs



Wide voltage protection:
160V-360V with surge
protection up to 3.5kV



Modern design:
Low glare and
no flicker



Uniform lighting:
Comes with high
performance diffuser



Other features:
Resistant to yellowing
and chipping

Waterproof Batten




Long life:
30,000 burning hrs



Housing:
Polycarbonate
housing and SS hardware



IP rating:
Dust and waterproof
LED luminaire

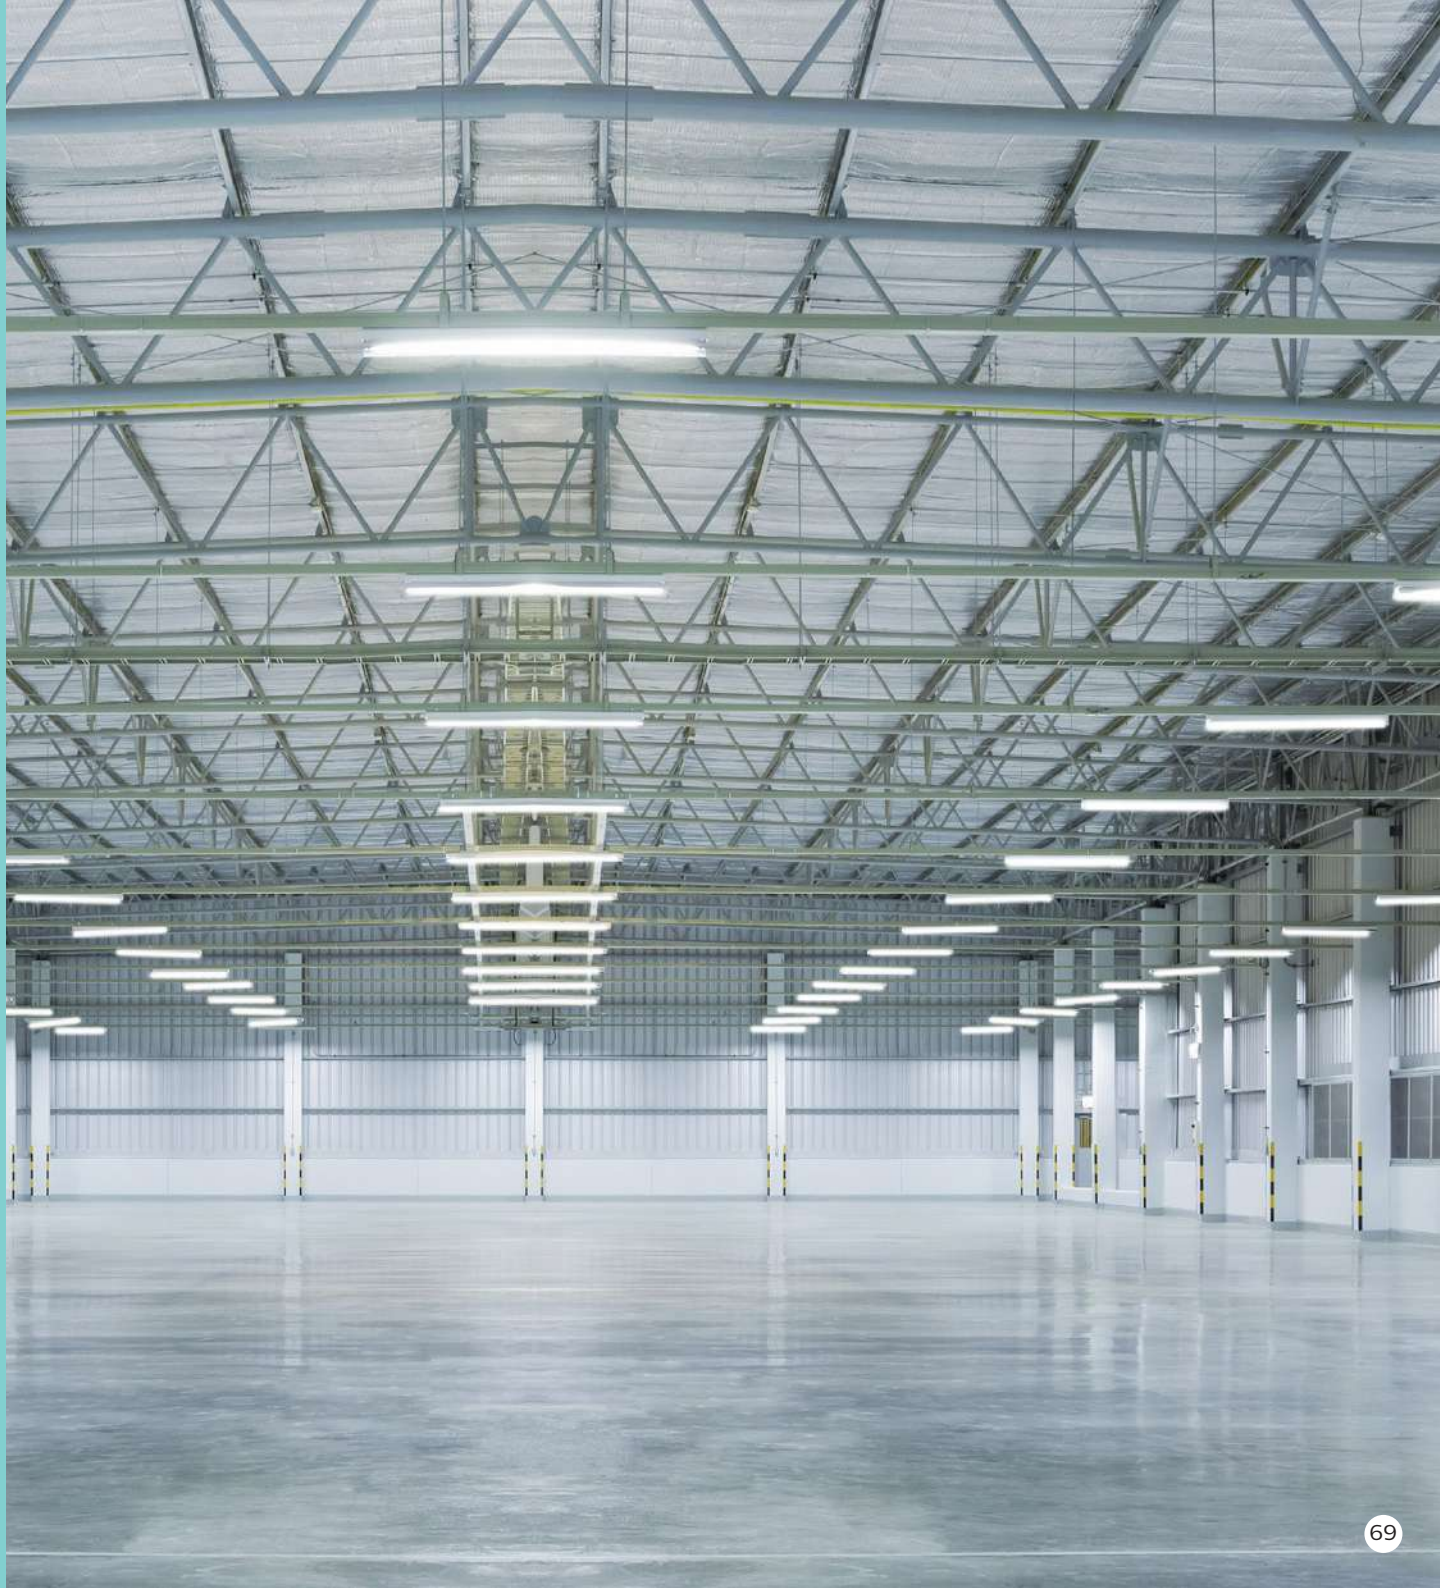



Essential SmartBright SQ

Model Number	Wattage	Lumen	MRP (₹)
WT068C CW LED18 L600 PSU IN	15W	1800	2100/-
WT068C CW LED40 L1200 PSU IN	30W	4000	3100/-
WT068C CW LED56 L1500 PSU IN	46.5W	5600	4000/-

HSN Code: 94051100



Best for harsh industrial environment



IP66/IK07 rated product



120lm/w with CRI>=80



Available in 3 different sizes- 2ft, 4ft, 5ft

Color available:





SmartBright Waterproof

Model Number	Wattage	Lumen	MRP (₹)
WT150C LED20S	16W	2000	2800/-
WT150C LED40S	34W	4000	3800/-

HSN Code: 94051100



Long life:
30,000 burning hrs



IP rating:
Dust and waterproof
LED luminaire



Energy efficient:
>120 lumens/watt



Housing:
Polycarbonate
housing and SS hardware



Impact resistance:
IK08



Mounting:
Suitable for both wall and
suspended mounting with
relevant mounting accessories

Color available:

NW

CW

Outdoor Professional Trade Luminaires

Discover Philips selection of easy-to-install outdoor professional luminaires. The LED outdoor lighting products are designed to be energy-efficient and economical, and are suitable for a range of commercial and industrial applications.



Flood



Long life:
25,000 burning hrs



Housing:
Diecast aluminum



Surge protection:
4kV





SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP170 LED10 CW/WW 10W FG GR PSU	10W	1000	900/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Diecast aluminum



IP65 rated product



Surge protection:
4kV



Efficacy:
100 lumens /watt



IK07 rated product

Color available:

NW

CW

WW



SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP101 LED 20 CW / NW / WW FG GR PSU	20W	2000	1200/-
BVP102 LED 30 CW / NW/ WW FG GR PSU	30W	3000	2650/-

HSN Code: 94051090



Long life:
25,000 burning
hrs



Housing:
Diecast
aluminum



Surge
protection:
4kV



IP65 rated
product



IK07
rated
product



Class B
serviceability:
Potted driver



Efficacy:
100 lumens/watt

Color available:



SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP173 LED55 CW/NW/WW 50W FG GR PSU	50W	5500	5000/-
BVP174 LED77 CW/NW/WW 70W FG GR PSU	70W	7700	7000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure diecast



Surge protection:
4kV



IP65 rated product



IK07 rated product




Class B serviceability:
Potted driver



Efficacy:
>= 110 lumens/watt

Color available:



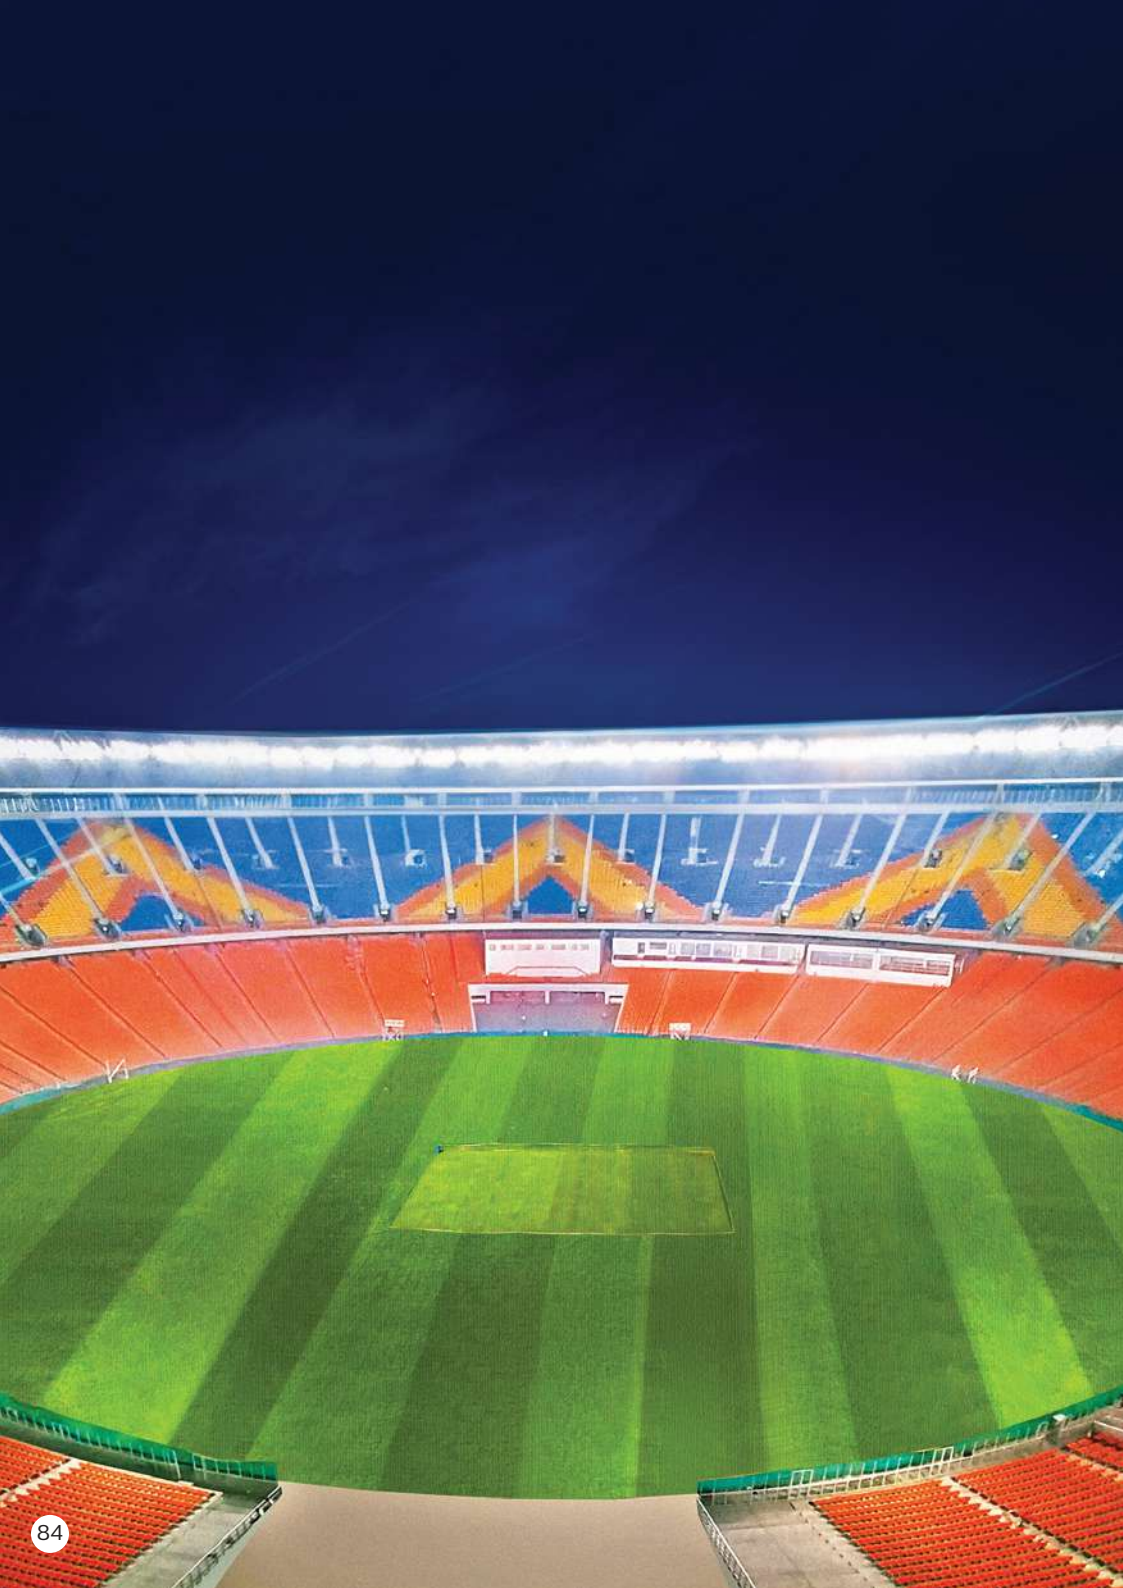

SmartBright Essential Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVP175 LED110 CW/NW/WW 100W FG GR PSU	100W	11000	9500/-
BVP176 LED165 CW/NW/WW 150W WB FG GR PSU	150W	16500	14000/-
BVP177 LED220 CW/NW/WW 200W WB FG GR PSU	200W	22000	18000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure diecast



Efficacy:
110 lumens/watt



Surge protection:
4kV internal (both CM/DM modes) with inbuilt 10KV SPD



IP rating:
IP65



CRI: 70



Class B serviceability:
Potted driver



Impact resistance:
IK07

Color available:



Street



Long life:
25,000 burning hrs



Housing:
Pressure diecast



Surge protection:
Up to 4kV
IP65 & IK07





SmartBrite Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRP029 LED25 CW / WW MR PSU GR DX	25W	2500	2500/-
BRP030 LED35 CW / WW MR PSU GR DX	35W	3500	3500/-
BRP031 LED45 CW / WW MR PSU GR DX	45W	4500	5000/-
BRP032 LED60 CW / WW SLR GR PSU	60W	6000	6000/-
BRP032 LED70 CW / WW MR PSU GR DX	70W	7000	7000/-
BRP033 LED90 CW/WW MR PSU GR DX	90W	9000	9000/-
BRP033 LED100 CW/WW MR PSU GR DX	100W	10000	10000/-
BRP033 LED120S CW / WW MR PSU GR DX	120W	12000	12000/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure diecast



Class B serviceability:
Potted driver



Surge protection:
Up to 4kV
IP65 & IK07



Efficacy:
>=100 lumens/watt

Color available:



City Beautification Range

Discover Philips city beautification range and create an identity and brand your city as unique, beautiful, vibrant and secure place. Dynamic and intelligent architectural LED lighting can transform the night scene, enhancing urban architecture and public spaces and creating an inviting ambience for citizens and visitors.





SmartBright Essential Bollard

Model Number	Wattage	Lumen	MRP (₹)
BCP100 LED CW/NW/WW 10W PSU GR M 600mm	10W	800	8000/-
BCP100 LED CW/NW/WW10W PSU GR L 750mm	10W	800	9000/-

HSN Code: 94054010



Surge protection:
100V-240V
IP65 & IK07



Weatherproof
luminaire with
IP65 protection



Bigger dia of 76mm
insuring uniform
diffused light



Long lasting,
sturdy and
refined finish

Color available:





Garden Spike

Model Number	Wattage	Lumen	MRP (₹)
581952 Black Garden Spike	5W	250	1700/-
581953 Black Garden Spike	10W	550	2250/-

HSN Code: 94054090



Long life:
25,000 burning hrs



Housing:
Pressure diecast spigot



Surge protection:
Up to 2kV
IP65 & IK07



Efficacy:
>= 55 lumens/watt

Color available:





Uniscape LED Post Top

Model Number	Wattage	Lumen	MRP (₹)
BGP200 LED26 CW/WW/NW PSU GR CPC SPD	26W	2600	9000/-
BGP200 LED35 CW/WW/NW PSU GR CPC SPD	35W	3500	10500/-
BGP200 LED45 CW/NW/WW PSU GR CPC SPD	45W	4500	13000/-
BGP201 LED26 CW PSU GR CPC SPD	26W	2600	9000/-
BGP201 LED35 CW PSU GR CPC SPD	35W	3500	10500/-
BGP201 LED45 CW PSU GR CPC SPD	45W	4500	13000/-

HSN Code: 94054010



Long life:
25,000 burning hrs



Housing:
Pressure diecast
spigot



Surge protection:
Up to 4kV
IP65 & IK07



Efficacy:
>=100 lumens/watt


Color available:



Professional Lamps

Discover Philips range of Professional lamps and enjoy a superior quality of light through our energy efficient lighting products, systems and services embracing the beauty of your landscapes.



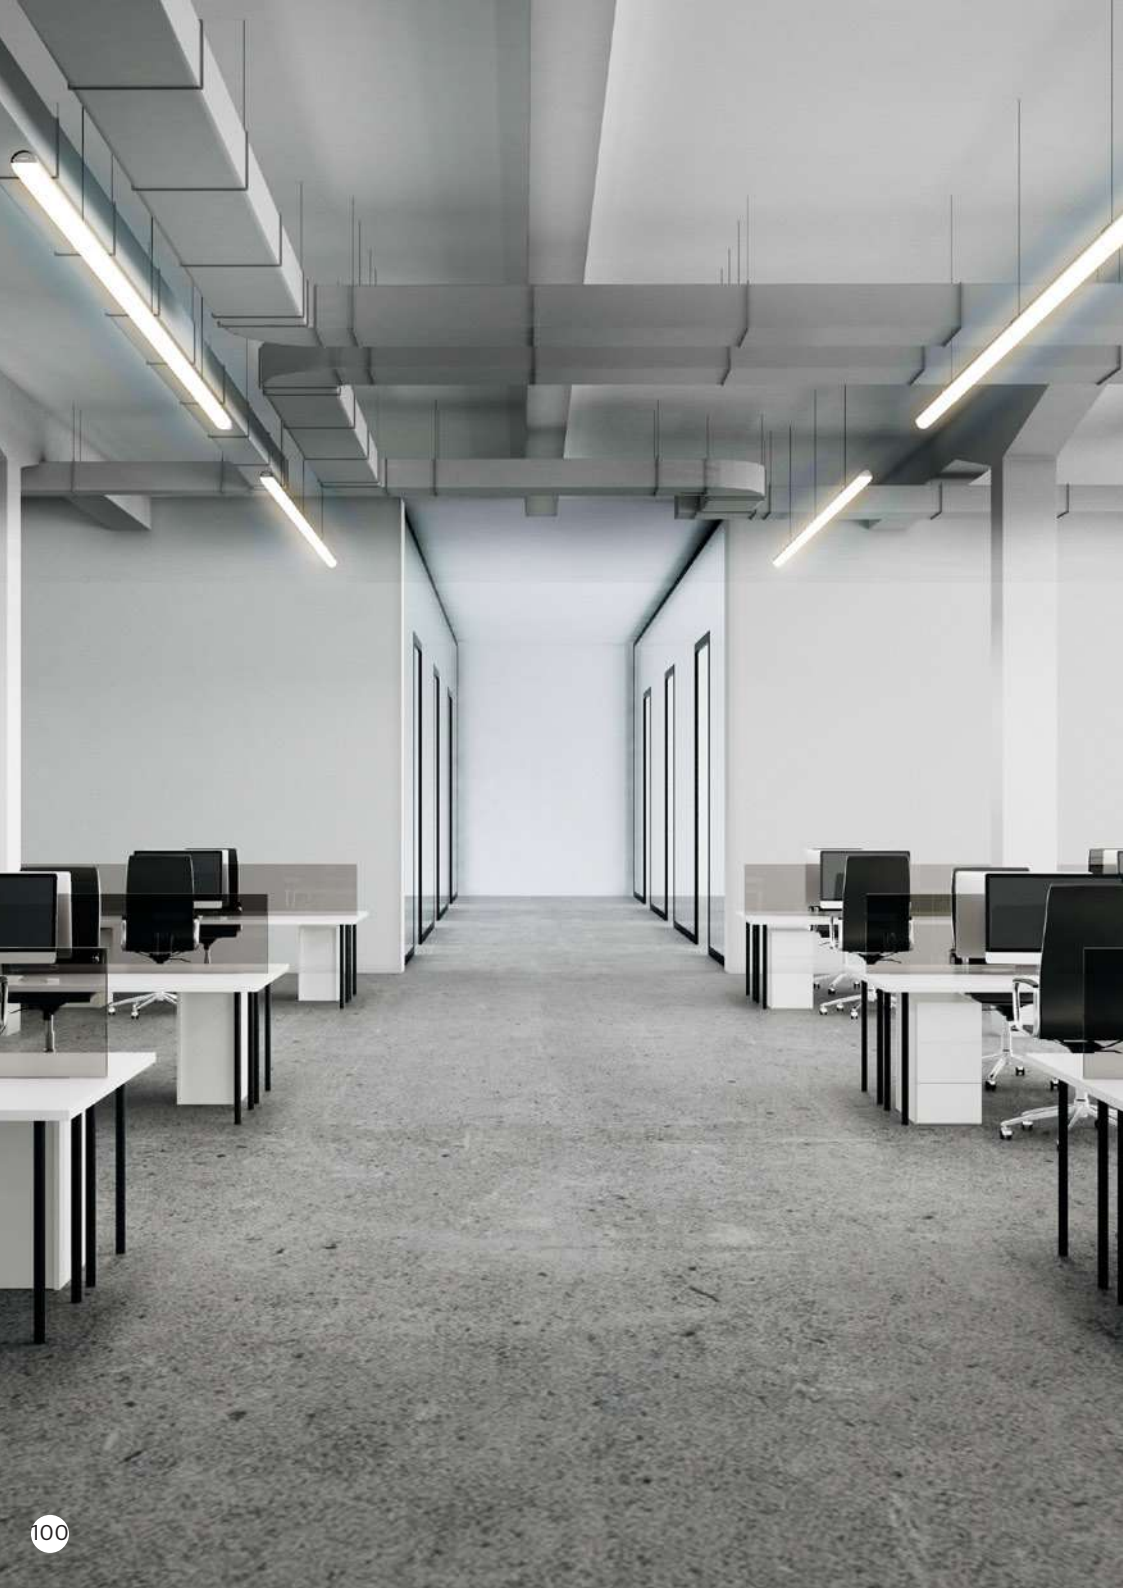

LEDtube PC

Model Number	Wattage	Lumen	MRP (₹)
MAS LED tube 18W 2100 Lm 865 T8 (Pc)	18W	2100	700/-

HSN Code: 85395000



Long life:
40,000 burning hrs



Housing:
Polycarbonate housing with opal finish for glare-free uniform lighting



Surge protection:
3kV



Lumen efficacy:
>= 116 lumen/watt



Over voltage protection:
380V withstands for 2 minutes

Color available:

CW



LEDtube Ecofit

Model Number	Wattage	Lumen	MRP (₹)
Ecofit LED tube 18W 2100 Lm	18W	2100	549/-

HSN Code: 85395000



Long life:
15,000 burning hrs



Housing:
Polycarbonate housing with opal finish for glare-free uniform lighting



Surge protection:
3kV



Luminosity:
Bright with low glare

Color available:






LEDtube Glass

Model Number	Wattage	Lumen	MRP (₹)
Essential LED tube 20W B2B 865 T8	20W	2200	400/-

HSN Code: 85395000

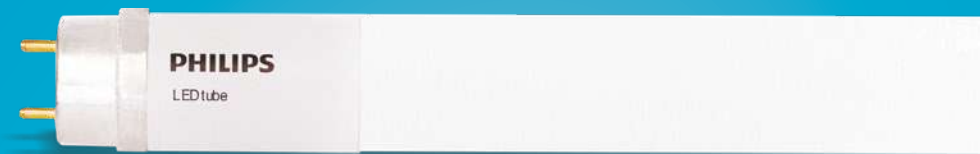

Long life:
15,000 burning hrs



Housing:
Perfect replacement of
existing 1200mm T8 fluorescent
tubelight fixtures



Surge protection:
2.5kV

Color available:

CW



MAS LEDtube

Model Number	Wattage	Lumen	MRP (₹)
Master LEDtube	30W	4000	1499/-

HSN Code: 85395000



Long life:
40,000 burning hrs



Surge protection:
3kV



Thermal:
Inbuilt aluminum heat sink hence more durable

Color available:





LED Spot MR16

Model Number	Wattage	Lumen	MRP (₹)
MR16 4.5-50W 830/865	4.5W	400	299/-

HSN Code: 85395000

LED Spot GU10

Model Number	Wattage	Lumen	MRP (₹)
4.6-50W GU10 827/830/865	4.6W	400	399/-

HSN Code: 85395000



Beam angle:
36 degree

Color available:





TrueForce Highbay

Model Number	Wattage	Lumen	MRP (₹)
TFORCE HB 140W E40 865/840 NB/WB GM	140W	20000	9999/-

HSN Code: 85395000



Long life:
50,000 burning hrs



Beam:
Wide beam and
narrow beam options



Mounting:
Very high ceiling
applications in
industry and retail

Color available:

NW

CW



LED PLL

Model Number	Wattage	Lumen	MRP (₹)
LED PLL 18W 6500K 2G11	18W	1800	599/-

HSN Code: 85395000



Long life:
15,000 burning
hrs



Housing:
PVC



Color available:

CW

Solar Range

Solar lighting, apart from being free and renewable, has several other benefits. Philips range of solar lighting solutions brings light to areas without access to electric grid. The sturdy and durable Philips solar lighting range not only saves energy and is environment-friendly, but also preserves the landscape as no trenching for cabling is required in them.





Essential SmartBright Solar All-in-one Streetlight

Model Number	Wattage	Lumen	MRP (₹)
BRC010 LED10S	7.5W	1000	7900/-
BRC010 LED20S	15W	2000	11000/-
BRC010 LED40S	25W	4000	12800/-

HSN Code: 94054010



Installer friendly:
Easy to install. No trenching for cabling required



Configurable:
Easy configurability and remote control for selecting lighting profile



Highly efficient:
High lumen efficacy of up to 160 lm/w saves energy

Color available:





Philips Essential SmartBright Solar Floodlight

Model Number	Wattage	Lumen	MRP (₹)
BVC080LED6	4W	600	5750/-
BVC080LED9	6W	900	7000/-
BVC080LED15	10W	1500	10500/-

HSN Code: 94054010



IP65 rated product



CRI: 70



ABS housing



Watt 500 for
10W product

Color available:

CW



Philips Essential SmartBright Solar Wall Light

Model Number	Wattage	Lumen	MRP (₹)
BWS010 LED50	.5W	50	1200/-
BWS010 LED100	1W	100	1950/-
BWS010 LED300	3W	300	2500/-

HSN Code: 94054010



IP54 rated product



CRI: 70



ABS housing

Color available:

CW



Philips Essential SmartBright Solar Garden Spike Spot

Model Number	Wattage	Lumen	MRP (₹)
Garden Spike Spot	2.1W	300	3000/-
Garden Spike Spot	0.75W	100	3000/-
Round Gate Top	2.1W	300	3000/-

HSN Code: 94054010



Easy
installation



Environment
friendly



Safer than AC



Less dependence
on grid

Color available:

WW



Philips Essential SmartBright Solar Bollard

Model Number	Wattage	Lumen	MRP (₹)
BGC010 LED2/730 RS	1.5W	200	4600
BGC010 LED2/730 SS	1.5W	200	4600
BGC010 LED3/730 RL	2.2W	200	5100
BGC010 LED3/730 SL	2.2W	200	5100
BGC010 LED2/730 R Spike	1.5W	200	4050
BGC010 LED2/730 S Spike	1.5W	200	4300

HSN Code: 94054010



Easy
installation



Environment
friendly



Less
dependence
on grid



Safer
than AC



Inbuilt panel,
battery, CC



300 lumen
3000k CCT

Color available:

WW



Philips Essential SmartBright Solar Indoor Suspended Lamp

Model Number	Wattage	Lumen	MRP (₹)
SP010P LED7/765 IN	6W	700	2700

HSN Code: 94054010



Easy installation



Environment friendly




Inbuilt panel, battery, 300 mAh



Less dependence on grid



ABS housing



300 lumen 3000k CCT

Color available:

CW



Philips Solar Flame Light

Model Number	Wattage	Lumen	MRP (₹)
BGC010 96LED Solar Flame light	0.88W	Nil	2499/-
BGC010 51LED Solar Flame light	0.5W	Nil	2299/-

HSN Code: 94054010



Easy installation



Environment friendly



Lithium battery included



Safer than AC



ABS housing



Less dependence on grid



PV panel included



Waterproof

Color available:





Solar Up and Down Wall light

Model Number	Wattage	Lumen	MRP (₹)
BWC010 LED1/730 IN	0.75W	100	1900

HSN Code: 94054010



Easy
installation



Environment
friendly



Less
dependence
on grid



Safer
than AC



Inbuilt panel,
battery, CC



100 lumen
3000k CCT



213mm



3-4 hours
back up

Color available:

ww




Solar Gate-top (Square and Round)


Model Number	Wattage	Lumen	MRP (₹)
BGC010 LED3/730 S Gate Top IN	2.1W	300	4050
BGC010 LED3/730 R Gate Top IN	2.1W	300	4050


HSN Code: 94054010




- 

Easy installation
- 


Environment friendly
- 

Less dependence on grid
- 

Safer than AC
- 

Inbuilt panel, battery, CC
- 


100 lumen 3000k CCT
- 

213mm
- 

Remote for dimming
- Color available:

ww

Driver

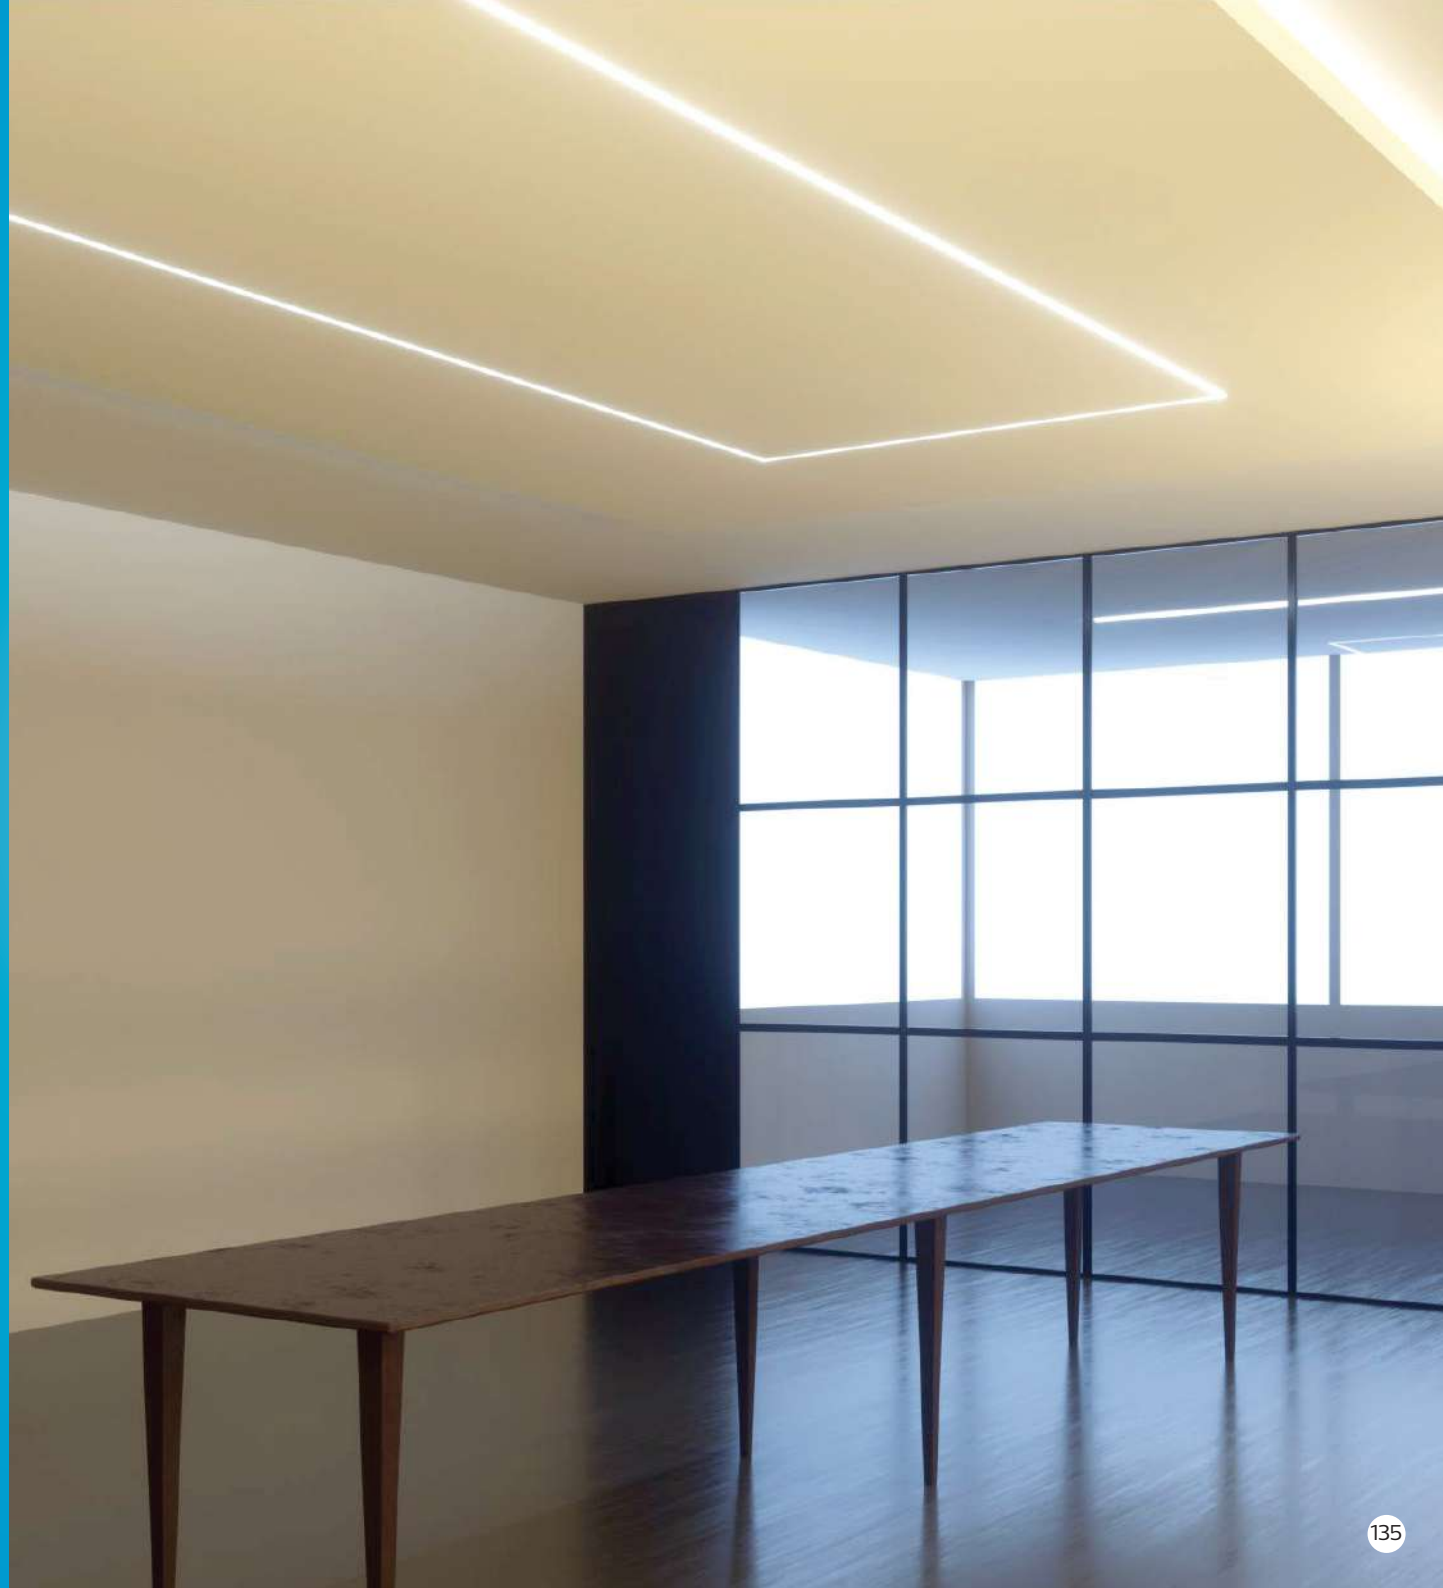



LED Transformer/Driver

Description	Wattage	MRP (₹)
LED Transformer 24W 12V 2A GEN2	24W	400
LED Transformer 60W 5A 12VDC	60W	799
LED Transformer 120W 10A 12VDC CV	120W	2000
LED Transformer 150W 12.5A	150W	3000
LED Transformer 300W 25A	300W	4000
Certa Drive 40W 1A	40W	TBD
Xitanium 120W 0.7A 240V OEM	120W	TBD
Xitanium 100W 0.7A 240V OEM	100W	TBD
Xitanium 75W 0.7A 240V OEM	75W	TBD
Xitanium 150W 0.7A 240V OEM	150W	TBD
Xitanium 220W 0.7A 240V OEM	220W	TBD

HSN Code: 94059900



Notes

Notes



Scan to visit the
product website

